



GRIZZL-E ULTIMATE COMMERCIAL

Grizzl-E Ultimate Commercial combines Grizzl-E Hardware with Epic Software for the complete commercial EV Charging solution.


Grizzl-E Ultimate Commercial is the perfect charging solution for everything from retail parking lots to condominiums. Grizzl-E Ultimate Commercial includes Grizzl-E hardware, 3-year equipment warranty, and a 3-year pre-paid Epic EV Charging Commercial Software.

With a Wi-Fi connection, the Grizzl-E Commercial is all you need to tap into the EV charging market. Customers do not need to download an app or register for an account, and there are no RFID cards. Simply scan the QR code and pay through the mobile browser to begin.



FEATURES THAT MATTER

Grizzl-E Commercial with Epic Charging Software has everything you need in one place: high reliability, credit card transactions, and EV charging reports.

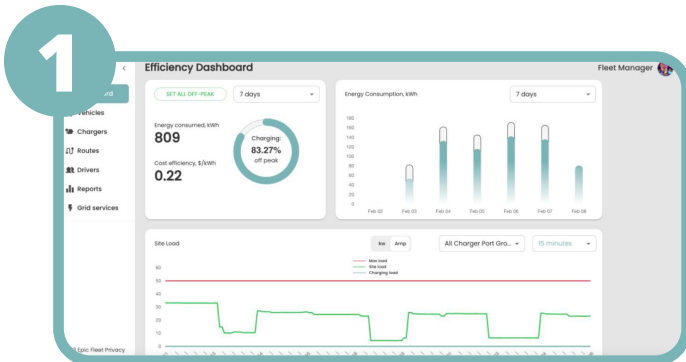

2

The Changers interface displays a list of chargers with columns for Name, Status, and Parking Space. A mobile app interface is shown, allowing users to select a charging time (Start: 09:00, End: 04:00) and set the time zone (PST8PDT).

3

The Reporting interface displays a table of energy usage data for selected chargers. The table includes columns for Charger ID, Total Energy (kWh), and various metrics.

Charger ID	Total Energy (kWh)
CHARGE001_001	25.7
CHARGE001_002	45.5
CHARGE001_003	23.3
CHARGE001_004	5.7
CHARGE001_005	40.8
CHARGE001_006	0.0000
CHARGE001_007	7

4

The Update Charger interface allows users to update charger details. It includes a 'Do you want to collect payments for charging?' question and a 'Enter Charging price' field. A mobile app interface is shown, displaying a QR code for payment.

1 **Reduce Infrastructure Costs**
Energy Management provides reliability and allows for more chargers per circuit.

2 **Automated Off-Peak Charging**
Save up to 4X on electricity costs with one-click off-peak scheduling.

3 **Reliability and Reporting**
Maintain highly reliable chargers with automated Health Monitoring every 20 seconds and create reports on energy usage and network management.

4 **Easy and Accessible Charging**
Simple App-Free Payments for customers. No need to sign up for an account. Convenient transactions for fleet and public users.




THE DURABILITY OF GRIZZL-E AND RELIABILITY OF EPIC CHARGING

- 1 Simple Wi-Fi Set-Up.** Easy to set up with a Wi-Fi connection.
- 2 Dashboard Access.** Visualize your EV charging data in a customizable admin dashboard.
- 3 High Reliability.** Automated Health Monitoring and a 97% up-time guarantee with our Maintenance Assurance Program.



Best Value

Grizzl-E Commercial allows you to start generating revenue from EV Charging for a single low price.



Load Sharing

Reduce your expenditures and electricity costs by utilizing site load management and charger group functionality



Top Rated

One of the highest-rated and best-selling Level 2 EV Chargers. Robust design built for any outdoor condition.





Water- and Fire-resistant
Indoor/Outdoor
rated aluminum cast
enclosure.



Over Current, Over
Voltage, Under Voltage,
Missing Diode, Ground
Fault Over Temperature
Protections.



Easy to install with
included mounting
bracket and hardwire kit.



UL Tested and Certified.

25 Pollard St, Richmond
Hill, Ontario,
Canada, L4B 1A8
1-833-971-8118
sales@unitedchargers.com
www.grizzl-e.com



TECHNICAL SPECIFICATIONS

Level 2 (208-240 VAC), 48A/80A Continuous Rated (11.5/20.0 kW)

- **Charging Connector**

J1772 (Type 1); NACS

- **Enclosure**

UL Type 4 Indoor/Outdoor Rated Aluminum Cast Enclosure

- **Dimensions**

EVSE: 10.25 x 6.25 x 3.75 inches (26.0 x 16.0 x 9.3 cm)

- **Operational Ratings**

Temperature: -22°F - 122°F (-30°C - 50°C); Humidity: 95% RH non-condensing

- **Adjustable Maximum Output Ratings**

80A; 19.2 kW Maximum Output – For use with 100A Circuit Rating;
48A; 11.5 kW Maximum Output – For use with 60A Circuit Rating;
40A; 10.0 kW Maximum Output – For use with 50A Circuit Rating;
32A; 7.68 kW Maximum Output – For use with 40A Circuit Rating;
24A; 5.76 kW Maximum Output – For use with 30A Circuit Rating;
16A; 3.84 kW Maximum Output – For use with 20A Circuit Rating.

- **Charge Cable Length**

25 ft. (7.6m)

- **Connectivity**

Wi-Fi Connection. Connects to 2.4Ghz Wi-Fi network.

- **Communications Protocol**

OCPP 1.6j

- **Electrical Connection**

Hardwired by a licensed electrician.

- **Simple, Flexible Mounting Options**

Wall Mount, Pedestal, Bollard/Pole with security option.

- **Electrical Circuit / Input Power Requirements**

Circuit Requirement: Dedicated Single Phase 208-240VAC, 50/60 Hz;
Branch Breaker: Double pole; Circuit Conductors: Line 1, Line 2, Ground.

- **Display & Indicators**

LED Charge Status Indicators (Ready, Charging, Fault, Connected).

- **Safety Features**

Over Current, Over Voltage, Under Voltage, Missing Diode, Ground Fault, and Over Temperature Protections. Self-Monitoring and Recovery, Power Outage Recovery. Built-in GFCI. Automatic fault recovery.

- **Certifications**

UL Certified for USA and Canada. Energy Star Certified

